




Portagomma PP
 Estremità maschio filettata
 Codice: DAFM

PP hose adaptor
 Male parallel threaded
 Code: DAFM

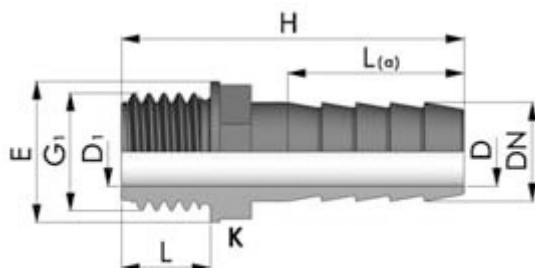

G ₁ (inch)	DN (mm)	D (mm)	D ₁ (mm)	H (mm)	L _(a) (mm)	E (mm)	L (mm)	K (mm)
¼"	12	7,5	8,0	48,0	27,0	12,0	15,0	15,0
⅜"	16	10,0	10,5	58,5	30,0	23,0	10,5	20,0
½"	20	13,0	14,0	65,0	30,5	28,0	15,0	22,0
¾"	25	19,0	19,0	75,0	37,0	33,0	16,5	27,0
1"	30	22,5	23,0	75,5	36,0	42,0	18,5	36,0
1¼"	40	32,0	32,5	83,0	43,5	47,5	21,0	41,0
1½"	50	42,0	38,5	84,5	44,0	54,5	21,0	50,0
2"	60	51,5	48,5	91,0	46,5	65,0	25,0	60,0

- Colore: Beige RAL 7032
- Giunzione: Filettatura cilindrica secondo UNI ISO 228/1
- Dimensioni: Ø ¼" ÷ Ø 2"
- Temperature di esercizio: - 10°C ÷ +100 °C
- Pressione di esercizio max: 10 bar

- Color: Beige RAL 7032
- Joint: Gas parallel threading standards UNI ISO 228/1
- Dimensions: Ø ¼" ÷ Ø 2"
- Working temperature: - 10°C ÷ +100 °C
- Max working pressure: 10 bar