Valvola manuale a sfera serie industria

Caratteristiche

- Valvola bighiera serie industria a due vie con corpo in PVC e attacchi bocchettonati femmina per incollaggio
- Gamma dimensionale da DN 65 mm a DN 100 mm, da R 2 ½" a R 4"
- Guarnizioni di tenuta in EPDM (Dutral®) o in FPM (Viton®)
- Resistenza a pressioni di esercizio fino a 16 bar a 20° C
- Facile smontaggio radiale dall'impianto e conseguente rapida sostituzione degli O-ring e delle guarnizioni della sfera senza l'impiego di alcun attrezzo
- Nuovo sistema di tenuta, possibilità di micro-registrazione con apposita ghiera e sistema di bloccaggio delle spinte assiali
- Possibilità di smontaggio delle tubazioni a valle con la valvola in posizione di chiusura
- Maniglia ergonomica che assicura ottima manovrabilità, dimensioni compatte e preciso accoppiamento con lo stelo di manovra; può essere dotata di blocco manovra per inibire la rotazione della sfera sia in chiusura che in apertura (0°-90°)
- Possibilità di installare riduttore manuale o attuatori pneumatici e/o elettrici mediante l'applicazione di una flangetta in PP-GR a foratura standard ISO 5211 F07.

Manual ball valve industry series

Characteristics

- *2-Way industry ball valve with PVC body and metric series plain female sockets for solvent welding*
- *Size range from DN 65 mm up to DN 100 mm and from R 2 ½" up to R 4"*
- *Gaskets in EPDM (Dutral®) or FPM (Viton®)*
- *Maximum working pressure: 16 bar at 20° C*
- *Easy removal of the valve body from the system, allowing quick replacement of O-rings and ball seats without additional equipment*
- *Patented Dual Block® system to avoid accidental nuts unscrewing; new seat and seal design. Axial pipe loads block with micro adjustment of ball seal*
- *In the closed position the pipeline can be disconnected downstream from the valve without leakage*
- *Hand operated version provides very good manoeuvrability has a compact design and precision jointing with the valve stem. There is also the option to equip the handle with a block, wich can lock the valve in both the open and closed position (0°-90°).*
- *Possibility to install gear box and actuators by means of a GR-PP upper flange with standard drilling (ISO 5211 F07)*

Dimensioni ***Dimensions***

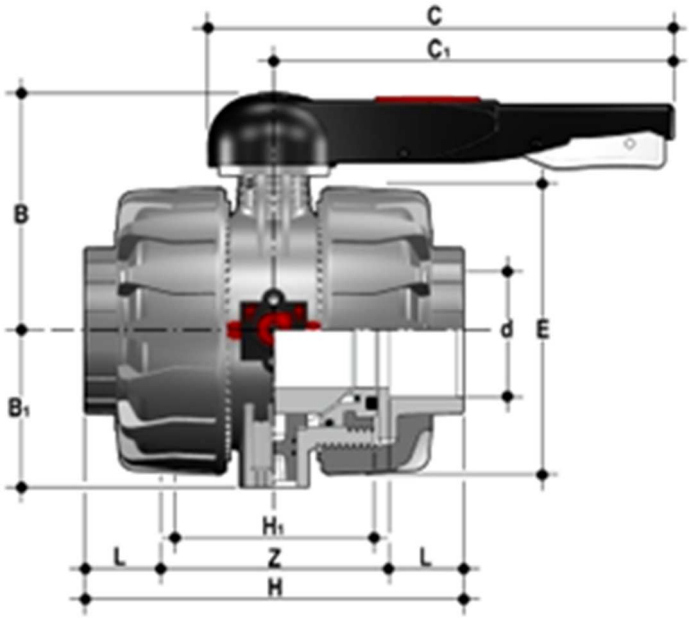

d	DN	PN	Z	L	H	H_1	E	B	B_1	C	C_1	Peso *Weight* (gr)
75	65	16	147	44	235	133	164	164	87	225	175	4380
90	80	16	168	51	270	149	203	177	105	327	272	7200
110	100	16	186	61	308	167	238	195	129	385	330	11141