



Valvola sfogo aria

Caratteristiche


- Valvola di sfogo aria con attacchi bocchettonati femmina filettati gas
- Ha la funzione di eliminare dalle tubazioni l'aria immessa insieme al liquido
- Corpo in PVC
- Guarnizioni in EPDM (Dutral®)
- Nessuna parte metallica a contatto con il fluido
- Resistenza a pressioni di esercizio fino a 16 bar a 20 °C
- Le operazioni di manutenzione possono essere effettuate con il corpo valvola installato
- Idoneità del PVC a venire in contatto con acqua potabile ed altre sostanze alimentari secondo le leggi vigenti

Air release valve

Characteristics


- Air release valve with female threaded sockets
- Is double acting and is designed for the elimination of air present in pipelines
- Body in PVC
- EPDM (Dutral®) gaskets
- No metallic parts are in contact with the fluid
- Pressure rating: maximum working pressure 16 bar at 20 °C
- Maintenance operations may be carried out with the valve body installed in-line
- The PVC is suitable for conveying foodstuff and drinking water and meets the necessary standard and regulations

Dimensioni – Dimensions

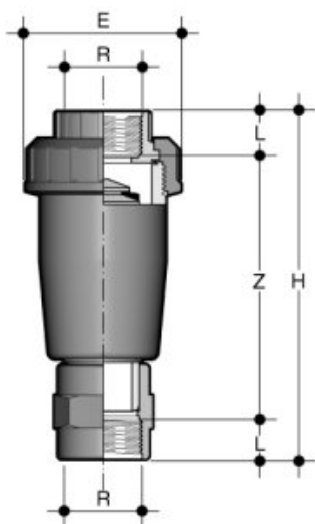

R	DN	PN	E	L	Z	H	Peso Weight (gr)
1/2"	15	16	55	15,0	94,0	124	120
3/4"	20	16	66	16,3	116,4	149	205
1"	25	16	75	19,1	136,8	175	360
1 1/4"	32	16	87	21,4	157,2	200	475
1 1/2"	40	16	100	21,4	166,2	209	670
2"	50	16	122	25,7	196,6	248	1130

Ricambi – Spare parts

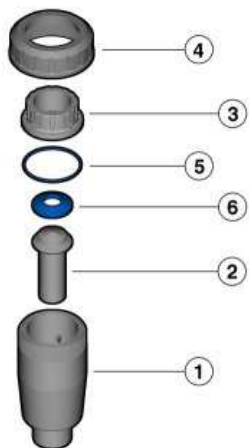

Pos.	N°	Componenti Components	Materiale Materials
1	1	Corpo – Body	PVC
2	1	Pistone – Piston	PVC
3	1	Collare – Union end	PVC
4	1	Ghiera – Lock nut	PVC
5	2	Guarnizione cassa– Body seal	EPDM
6	1	Guarnizione pistone– Piston seal	EPDM